



ACK 420 S

UP-CUTTING SAW MACHINE
ALTTAN ÇIKMA KESME MAKİNESİ

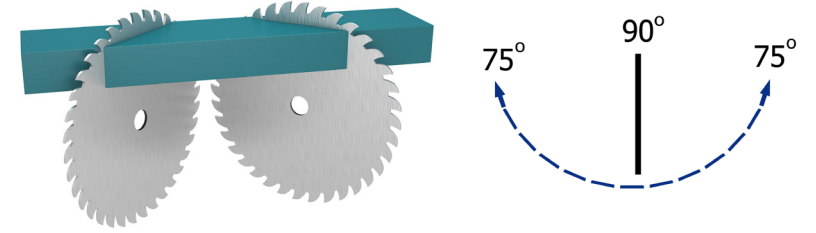

ACK 420 (Ø420 MM)
mm.

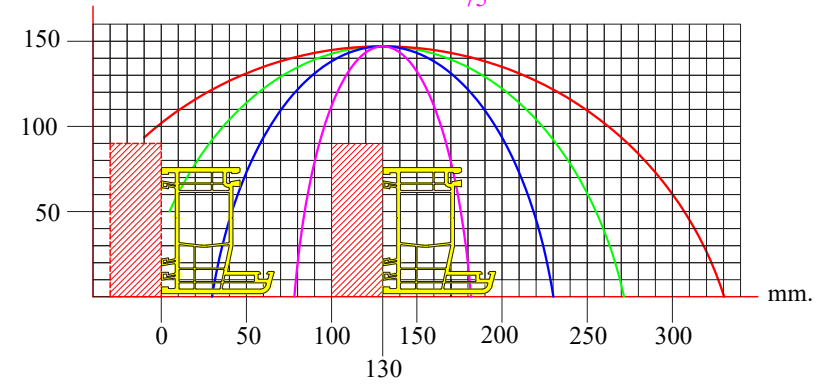

VCE 1570
Swarf vacuum extractor
Talaş emme sistemi

			Bar	Air Cons.	
2.2 kW 400V AC 3P PE	D: Ø420 mm d: Ø30/32 mm	2.900 RPM	6-8	130 L/min.	113x426x131
					205 250

GENERAL FEATURES

- Two-hand safety operation
- Location points at 75°, 60°, 45°, 30°, 22.5°, 15°, 0° both left and right
- Pivoting range from -75° left to +75° right infinitely adjustable
- Hydro-pneumatic saw feed
- Adjustable back fence for most effective use of the saw blade
- Adjustable saw blade feeding speed
- Manually opening safety guard
- Interior LED lighting

STANDARD ACCESSORIES

- Equipped with saw blade Ø420 mm
- Manuel MKN 300 length stop (3m)
- 2x pneumatic vertical clamps
- 2x infeed & outfeed tunnels for operator safety
- Spray saw blade lubrication system
- Air gun

OPTIONAL ACCESSORIES

- Laser marker indicating the cutting line
- Pneumatically working top guard
- Spare saw blade, Ø420 mm
- 2x pneumatic horizontal clamp
- VCE 1570 Chip vacuum extractor
- DKN 302 konveyör
- DKN 602 konveyör
- SKN 300 konveyör
- SKN 600 konveyör

GENEL ÖZELLİKLER

- Çift el kumanda uygulaması
- 75°, 60°, 45°, 30°, 22.5°, 15°, 0° açılarda sağ ve sol yönde susta ile kesim
- -75° sol ve +75° sağ tüm ara derecelerde hassas kesim
- Hidro-pnömatik kontrollü testere hareketi
- Daha yüksek kesim kapasitesi için hareketli gönye
- Ayarlanabilir testere çıkış hızı
- Manuel olarak açılan koruma kapağı
- Kabin içi LED aydınlatma

STANDART AKSESUARLAR

- Ø420 mm testere
- Manuel MKN 300 konveyör (3m)
- 2x dikey mengene
- 2x makine giriş ve çıkışına operatör güvenlik tüneli
- Püskürtmeli testere soğutma sistemi
- Havba tabancası

OPSİYONEL AKSESUARLAR

- Kesme hattını gösteren lazer işaretleme seti
- Pnömatik üst kapak
- Yedek Ø420 mm testere
- İlave 2x pnömatik yatay mengene
- VCE 1570 Vakum talaş emme sistemi
- DKN 302 konveyör
- DKN 602 konveyör
- SKN 300 konveyör
- SKN 600 konveyör

