




KD 400 D - KD 400 PS


MITER SAW MACHINE
DERECELİ KESME MAKİNESİ

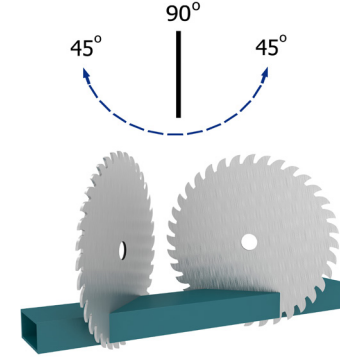


45° : 145 x 125 mm




90° : 205 x 125 mm



45° : 125 x 138 mm



90° : 175 x 138 mm

						
				Bar	Air Cons.	WxLxH cm
KD 400 D	2.2 kW 400V 3P PE 50-60 Hz.	D: Ø400 mm d: Ø30/32 mm	2.900 RPM	-	-	86x76x160
KD 400 PS	2.2 kW 400V 3P PE 50-60 Hz.	D:Ø400 mm d: Ø30/32 mm	2.900 RPM	6-8	7 L/min.	86x76x160
						123
						137
						115
						137

GENERAL FEATURES

- Location points at 45° - 30° - 22.5° - 15° - 0° both left and right
- Pivoting range from 45° left to 45° right infinitely adjustable
- Aluminium construction of the body and machine stand made of steel sheet
- Robust mechanical construction enables the ease of adjustment for the requested cutting angles

STANDARD ACCESSORIES

- Ø400 mm saw blade
- Machine stand
- 2x manual horizontal clamps (KD 400 D)
- 2x pneumatic horizontal clamps (KD 400 PS)
- Air gun (KD 400 PS)
- Spray saw blade lubrication system (KD 400 PS)

OPTIONAL ACCESSORIES

- MKN 300 roller conveyor (3m)
- Additional saw blade, Ø400 mm
- 2x pneumatic vertical clamps (KD 400 PS)

GENEL ÖZELLİKLER

- 45° - 30° - 22.5° - 15° - 0° açılarda sağ ve sol yönde susta ile kesim
- 45° sol - 45° sağ ara derecelerde hassas kesim
- Alüminyumdan imal edilmiş makine gövdesi ve çelik sacdan üretilmiş makine sehpa
- İstenilen açılara kolay ayarlanabilir mekanik altyapı

STANDART AKSESUARLAR

- Ø400 mm testere
- Makine sehpa
- 2x manuel yatay mengene (KD 400 D)
- 2x pnömatik yatay mengene (KD 400 PS)
- Hava tabancası (KD 400 PS)
- Testere soğutma sistemi (KD 400 PS)

OPSİYONEL AKSESUARLAR

- MKN 300 konveyör (3m)
- İlave Ø400 mm testere
- 2x pnömatik dikey mengene (KD 400 PS)

