


ACK 700

UP-CUTTING SAW MACHINE
ALTTAN ÇIKMA KESME MAKİNESİ

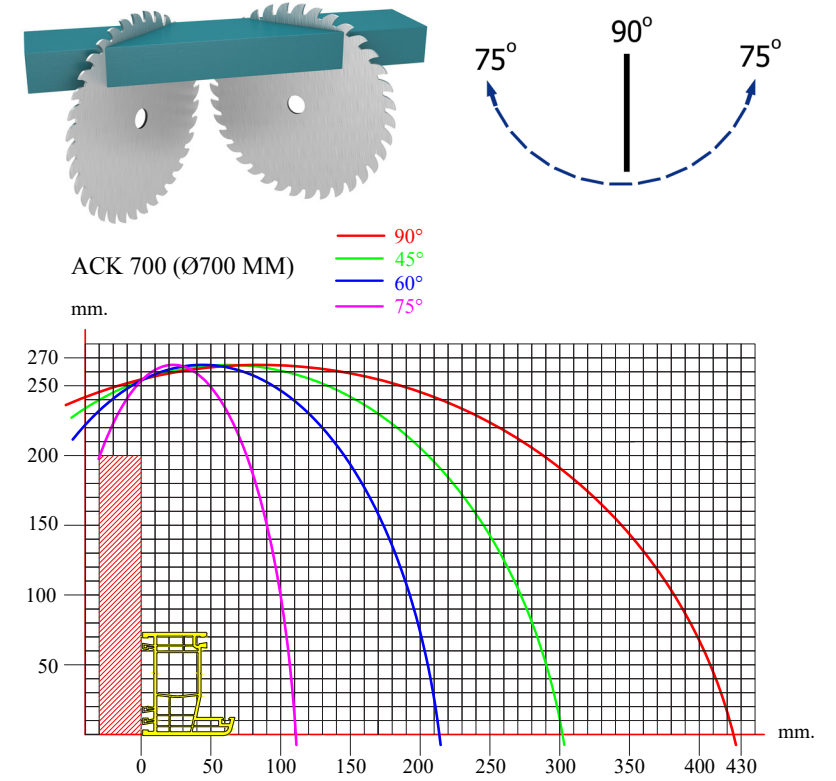

						
			Bar	Air Cons.		
4 kW 400V AC 3P PE 50-60 Hz,	D: Ø700 mm d: Ø38 mm	1.950 RPM	6-8	180 L/min.	WxLxH cm	500
					152x459x160	560

GENERAL FEATURES


- Two-hand safety operation
- Location points at 75°, 60°, 45°, 30°, 22.5°, 15°, 0° both left and right
- Pivoting range from -75° left to +75° right infinitely adjustable
- Hydro-pneumatic saw feed
- Adjustable saw blade feeding speed
- Interior LED lighting
- Pneumatically opening safety guard
- Safety locking switches on top guard and front doors
- Double acting clamps for operator safety

STANDARD ACCESSORIES

- Equipped with saw blade Ø700 mm and 4 kW motor
- Spray saw blade lubrication system
- MKN 301 roller conveyor (3 m)
- 2x vertical and 2x horizontal clamps
- 2x infeed & outfeed tunnels for operator safety
- Air gun

OPTIONAL ACCESSORIES

- Laser marker indicating the cutting line
- Spare saw blade, Ø700 mm
- VCE 1570 Chip vacuum extractor
- DKN 302 length stop
- DKN 602 length stop
- SKN 300 length stop
- SKN 600 length stop

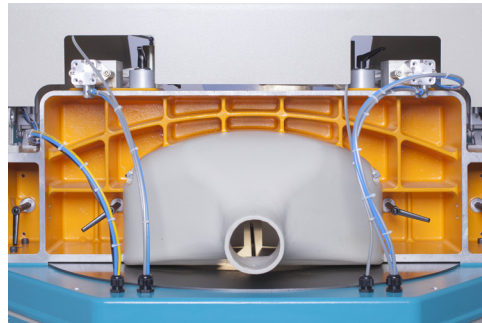

GENEL ÖZELLİKLER

- Çift el kumanda uygulaması
- 75°, 60°, 45°, 30°, 22.5°, 15°, 0° açılarda sağ ve sol yönde susta ile kesim
- -75° sol ve +75° sağ tüm ara derecelerde hassas kesim
- Hidro-pnömatik kontrollü testere hareketi
- Ayarlanabilir testere çıkış hızı
- Kabin içi LED aydınlatma
- Pnömatik olarak açılan güvenlik kapağı
- Üst kapak ve alt kapakta kilitlemeli güvenlik rölesi
- Operatör el koruma için pnömatik çift basınçlı mengene sistemi

STANDART AKSESUARLAR

- Ø700 mm testere & 4 kW motor
- Püskürtmeli testere soğutma sistemi
- MKN 301 konveyör (3m)
- 2x dikey ve 2x yatay mengene
- 2x makine giriş ve çıkışına operatör güvenlik tüneli
- Hava tabancası

OPSİYONEL AKSESUARLAR

- Kesme hattını gösteren lazer işaretleme seti
- Yedek Ø700 mm testere
- VCE 1570 vakum talaş emme sistemi
- DKN 302 konveyör
- DKN 602 konveyör
- SKN 300 konveyör
- SKN 600 konveyör

